

## STANDARTLAR / STANDARDS

TS IEC 60502-1  
IEC 60502-1  
VDE 0276-603  
IS 1516.1



## SERTİFİKALAR / CERTIFICATES



# XLPE İZOLELİ, PVC DIŞ KILIFLI, KONSANTRİK YER ALTI KABLOLARI

XLPE INSULATED AND PVC SHEATHED, UNDERGROUND CABLES

N2XCY YXCV

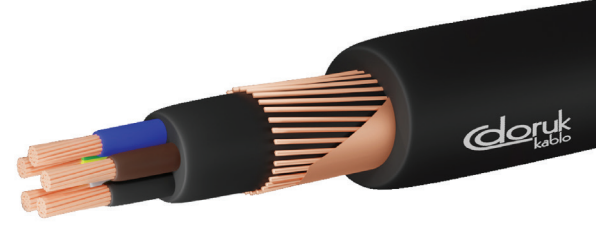

## TEKNİK VERİLER / TECHNICAL DATA

Cu/XLPE/PVC/CWS/CT/PVC

RoHS'a Uygun (RoHS Compliant)

Nominal Kesit mm <sup>2</sup> Nominal Cross Section mm <sup>2</sup>	Yaklaşık Dış Çap mm Overall Diameter mm approximately	Yaklaşık Net Ağırlık kg/km Net Weight kg/km approximately	İletken Direnci Max. ohm/km(20°C) Conductor DC Resistance at (20°C) max. ohm/km	Akım Taşıma Kapasitesi Current Carrying Capacity in	
				Toprakta (A) Ground (A)	Havada (A) Air (A)

## N2XCY (0,6/1 kV)

3x1,5/1,5	13,0	190	12,1	31	25
3x2,5/2,5	14	230	7,41	40	33
3x4/4	15	290	4,61	52	43
3x6/6	16,0	362	3,08	65	54
3x10/10	17,5	500	1,83	87	75
3x16/16	20,1	880	1,15	113	100
3x25/16	23,0	1056	0,727/1,15	146	136
3x35/16	25,0	1362	0,524/1,15	176	165
3x50/25	28,0	1770	0,387/0,727	208	201
3x70/35	33,0	2490	0,268/0,524	256	255
3x95/50	38,9	4058	0,193/0,387	307	314
3x120/70	41,0	4100	0,153/0,268	349	364
3x150/70	46,0	5030	0,124/0,268	391	416
3x185/95	51,0	6240	0,0991/0,193	442	480
3x240/120	58,0	8110	0,0754/0,153	509	565
3x300/150	66,0	12600	0,0601/0,124	580	638
3x400/185	74,5	16500	0,0470/0,0991	746	663
4x1,5/1,5	13,5	215	12,1	31	25
4x2,5/2,5	14,5	266	7,41	40	33
4x4/4	15,5	340	4,61	52	43
4x6/6	17,0	430	3,08	65	54
4x10/10	19,0	610	1,83	87	75
4x16/16	22,0	870	1,15	113	100
4x25/16	25,0	1315	0,727/1,15	146	136
4x35/16	28,0	1710	0,524/1,15	176	165
4x50/25	31,0	2230	0,387/0,727	208	201
4x70/35	37,0	3150	0,268/0,524	256	255
4x95/50	40,5	4190	0,193/0,387	307	314
4x120/70	46,0	5270	0,153/0,268	349	364
4x150/70	51,0	6480	0,124/0,268	391	416
4x185/95	57,0	8002	0,0991/0,193	442	480
4x240/120	64,0	10420	0,0754/0,153	509	565
4x300/150	75,00	16032	0,0601/0,124	580	638
5x1,5/1,5	14,0	242	12,1	31	25
5x2,5/2,5	15,5	304	7,41	40	33
5x4/4	17,0	390	4,61	52	43
5x6/6	18,0	504	3,08	65	54
5x10/10	20,0	720	1,83	87	75
5x16/16	23,0	1035	1,15	113	100
5x25/16	27,0	1580	0,727/1,15	146	136
5x35/16	30,0	2065	0,524/1,15	176	165
5x50/25	34,0	2760	0,387/0,727	208	201
5x70/35	40,0	3824	0,268/0,524	256	255
5x95/50	45,0	5130	0,193/0,387	307	314
5x120/70	51,0	6495	0,153/0,268	349	364
5x150/70	56,0	7950	0,124/0,268	391	416
5x185/95	63,0	8830	0,0991/0,193	442	480
5x240/120	70,0	12800	0,0754/0,153	509	565