


GEN TO BS EN
50525-2-11
VDE0250



PVC İZOLELİ VE KILIFLI, ÇOK TELLİ ÖRGÜLÜ KONTROL KABLOSU

PVC INSULATED AND SHEATHED, BRAIDING FLEXIBLE CONTROL CABLES

YY-SY KONTROL KABLOSU | YY-SY CONTROL CABLE

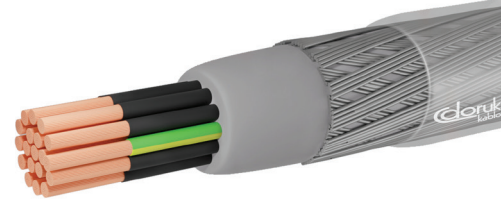

TEKNİK VERİLER / TECHNICAL DATA

Cu/PVC/PVC/GSWB/PVC

RoHS'a Uygun (RoHS Compliant)

Nominal Kesit mm ² Nominal Cross Section mm ²	Yaklaşık Dış Çap mm Overall Diameter mm approximately	Yaklaşık Net Ağırlık kg/km Net Weight kg/km approximately	İletken Direnci Max. ohm/km(20°C) Conductor DC Resistance at (20°C) max. ohm/km	Akım Taşıma Kapasitesi Current Carrying Capacity in	
				Boruda (A) Conduit (A)	Havada (A) Air (A)

YY-SY (300/500 V)

2x1,5	8,2	112	13,3	15	24
3x1,5	9,0	143	13,3	15	24
4x1,5	9,6	167	13,3	15	24
5x1,5	10,4	196	13,3	15	24
6x1,5	11,1	227	13,3	14	23
7x1,5	11,73	254	13,3	14	23
8x1,5	12,24	279	13,3	13,5	22,5
10x1,5	14,3	368	13,3	13,5	22,5
12x1,5	14,9	409	13,3	12	21
18x1,5	17,4	569	13,3	11	20
19x1,5	17,4	578	13,3	10	19
25x1,5	20,4	775	13,3	10	19
27x1,5	20,8	814	13,3	10	19
34x1,5	22,9	996	13,3	10	19
36x1,5	23,1	1026	13,3	10	19
2x2,5	9,4	156	7,98	20	32
3x2,5	9,9	184	7,98	20	32
4x2,5	10,6	219	7,98	20	32
5x2,5	11,5	259	7,98	20	32
6x2,5	12,7	315	7,98	19	31
7x2,5	12,7	331	7,98	19	31
12x2,5	16,6	552	7,98	18,5	30,5
14x2,5	17,3	614	7,98	18,5	30,5
18x2,5	19,4	777	7,98	18	30
19x2,5	19,4	792	7,98	16	28
25x2,5	22,8	1065	7,98	16	28
36x2,5	25,5	1399	7,98	16	28
3x4	11,7	264	4,95	25	42
4x4	12,7	321	4,95	25	42
5x4	13,7	380	4,95	25	42
3x6	13,2	350	3,30	33	54
4x6	14,3	427	3,30	33	54
5x6	15,7	518	3,30	33	54
3x10	16,2	540	1,91	45	73
4x10	17,6	663	1,91	45	73
5x10	19,5	826	1,91	45	73
3x16	19,1	788	1,21	61	98
4x16	21,0	992	1,21	61	98
5x16	22,8	1193	1,21	61	98
3x25	23,9	1204	0,780	83	129
4x25	26,4	1529	0,780	83	129
5x25	28,8	1849	0,780	83	129
3x35	26,1	1564	0,554	103	158
4x35	30,2	2077	0,554	103	158